

KD60
Series

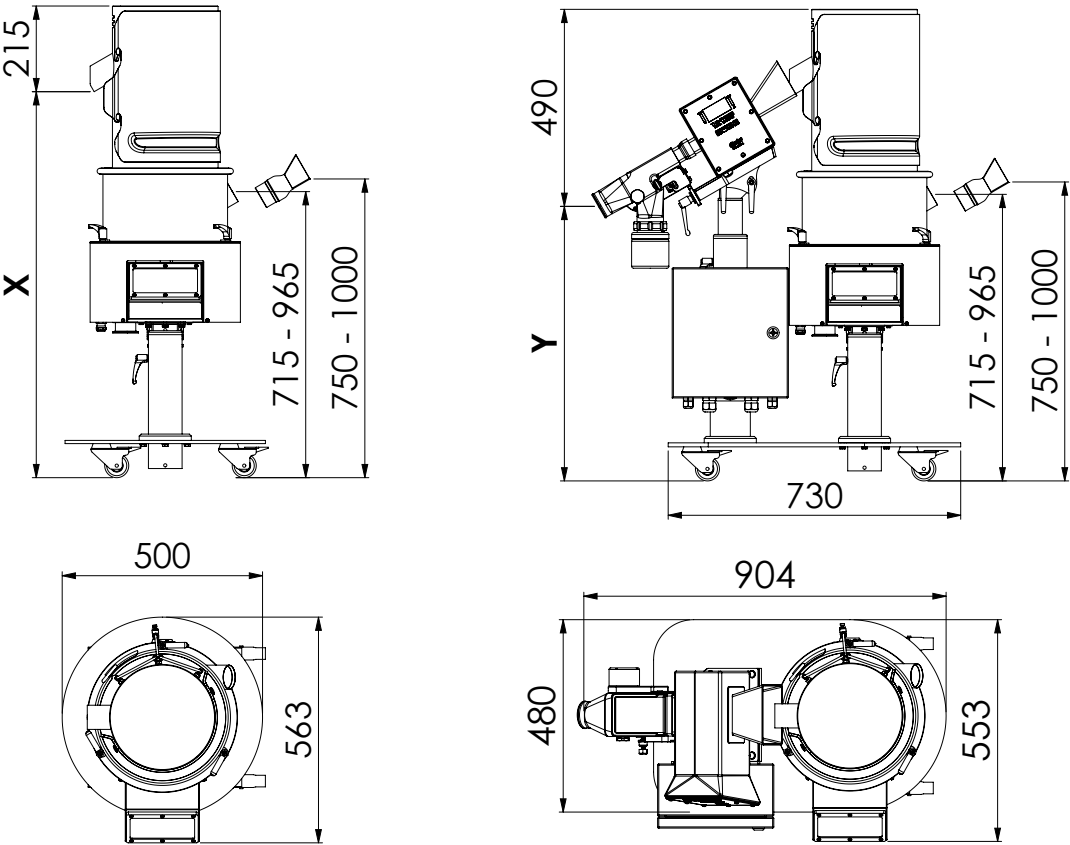


Table with 4 columns: Model (KD6010, KD6015), Weight, Outlet height X/Y, Ø Tablet inlet/outlet, and Suction port. It provides specifications for 250, 500, and 750 models.

Table with 2 columns: Conveying Capacity and Technical Data. It lists capacities for various tablet sizes and technical specifications like power supply, current, air flow, and noise emission.

Processable tablet thickness: 2 mm and above (standard version)
Optional: Special version available for thinner tablets

Table with 4 columns: KD6015 Metal detector type, CEIA EE (100x40), Lock PH IQ4 (95x38), and Safeline Tablex 2L (95x38). It lists detection limits for ferrous, non-ferrous, and stainless steel.



KRÄMER, THE SWISS ORIGINAL SINCE 1975

Krämer AG specializes in dedusting, conveying, capsule polishing and handling equipment for the pharmaceutical, nutraceutical and vitamin industries. Since Krämer's invention of the first vertical vibratory tablet deduster more than 45 years ago, the company has developed innovative equipment for customer-specific applications, and produced many industry firsts which have now become standards for every Krämer machine.

More than 10'000 Krämer dedusters and capsule polishers ensure a smooth daily operation in pharmaceutical plants. Multinational to regional manufacturers of tablets and capsules appreciate the quality and reliability of our products.

Krämer AG Switzerland
Grindelstrasse 23
CH-8303 Bassersdorf
Phone +41 44 838 44 66
Email sales@kraemerag.ch

Kraemer US, LLC
240 West Crescent Avenue
Allendale, New Jersey 07401, USA
Phone +1 201 962 8200
Email sales@kraemerag.com

Krämer AG (Switzerland) China Office
Room 2601, Block D, No. 80 Caobao Rd.
Xuhui District, Shanghai 200235, China
Phone +86 138 1841 6666
Email sales@kraemerag.cn

www.kraemerag.ch



© EN 07/2023 Krämer AG - Subject to change without notice

KD60
Series

FOR THE
CLEANEST
TABLETS



Krämer
The Swiss Original since 1975.

EVERYTHING AT A GLANCE

METAL DETECTION



SAFELINE

- Compact combination unit of deduster and metal detector from Ceia, Loma/Lock or Safeline
- All metal detectors offer best in class calibrated detection levels for the detection of ferrous (FE), non-ferrous (NFE) and stainless steel (SS) particles in tablets
- Total electrical integration with the deduster for transmitting metal detector signals to the tablet press

OPERATOR INTERFACE



- The LCD screen allows the operator to turn the machine on and off, and to chose the necessary conveying speed to operate with the tablet press
- The C820 remote operation feature allows for connection and operation through the tablet press controls if so equipped
- The C820 operates with an acceleration sensor in the drive to determine the optimum operating frequency for ease of operation and assures constant vibration, independent of the load or amount of tablets

PROCESS VIEWING



- The KD60 Series features a PETG lift off window for optimal process viewing and ease of access to the helix for easy removal for cleaning
- In addition, dust agitation compressed air nozzles are supplied for the cleanest tablets possible

CONNECTION PORTS



- 2 inch Tri-Clamp vacuum dust collection port for ease of assembly of a dust collection hose
- Various optional hose adaptors are available upon request. In addition, the power supply cable uses a quick connect plug
- The quick connect plug allows for use of preassembled cables with power supply as well as signal wire options for communication to upstream equipment such as tablet presses

INLET



- The tablet inlet can be rotated 360° with no tools, independent of the tablet outlet
- With the use of an optional rectangular tablet inlet 110 x 70 mm and various inlet adapters, the deduster can be easily adapted to the outlet configurations of different tablet presses
- If the adapter is not being used, a hose can directly be attached to the round Ø 60 mm inlet

DRIVE SYSTEM



- The KD60 Series vibratory drive features the Krämer patented counterweight system which allows for operation of the deduster with no vibration being transmitted to up stream or down stream equipment
- Because of the counterweight the machine is extremely quiet, low maintenance and allows for precise vibration control which is extremely gentle on the tablets
- The silicone membrane prevents dust from entering the vibratory drive unit

MAIN FEATURES

- Available in conveying heights of 250, 500 and 750 mm
- Upward conveying of tablets with diameter 3 - 25 mm by means of continuously adjustable vibration
- Designed according to cGMP specifications
- Lowest noise level < 68 dB
- Compact combination of deduster and metal detector for minimal footprint
- Flexible application thanks to 360°

- rotation freedom of tablet inlet and outlet (right or left of tablet press)
- Deduster on telescopic column for flexible adjustment of tablet inlet height
- Improved dedusting and deburring capabilities thanks to optimized combination of vibration, dust agitation air, and vacuum suction
- Vibration-free housing thanks to patented drive unit for trouble-free combination with metal detector

- Featuring an acceleration sensor that assures constant vibration, independent of the load / amount of tablets in the deduster
- The process can be monitored visually at all times through a large window
- Easy assembly and disassembly, no tools are needed
- Easy cleaning

AVAILABLE VERSIONS OF THE KD60 SERIES

KD6010



DEDUSTER

KD6015



DEDUSTER WITH METAL DETECTOR

EASY ASSEMBLY AND DISASSEMBLY

